



## SILENZIO™ (D) Drop-in Square Buffet Warmer



### PERFORMANCE

The square CookTek® Silenzio™ buffet warmer features a low-wattage, whisper-quiet drop-in design with aluminum housing and a plain black glass-ceramic top. Each unit is programmed with an automatic pan detection feature to ensure maximum and efficient warming of any induction-compatible enamel cast ironware or traditional chafer.\*



(CROSS-SECTION VIEW)

1. Chafing Dish
2. Silenzio™ Unit
3. Stone Countertop

Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

### FEATURES

- Models available in 650 or 1,000 (U.S. only) watts
- Drop-in design with aluminum housing
- Unobtrusive, easy-to-clean high temperature glass-ceramic top
- Four standard set temperatures with an option to add up to 11 temperature settings ranging from 80°F (27°C)–250°F (121°C)
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan; almost no energy consumption when pan is not present
- Lock feature prevents unwanted setting changes
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Standard Cat 5e or Cat 6 patch cable from unit to control box included
- Available in 100–120 VAC or 200–240 VAC, single phase
- Includes plug and cord (6 ft. nominal)
- One-year field-service warranty – U.S. and Canada

### ACCESSORIES (NOT INCLUDED)

- Large Round Chafer, 6.9 qt, Glass Lid with 1/1 SS Insert (Part # 301311)
- Large Round Stainless Insert, 1/1 (Part # CT-103128)
- Large Round Stainless Insert Split Pan, 2/2 (Part # CT-103771)
- Large Round Porcelain Insert, 1/1 (Part # CT-103095)
- Large Round Porcelain Insert Split Pan, 2/2 (Part # CT-103096)
- Medium Round Chafer, 4.8 qt, Glass Lid with 1/1 SS Insert (Part # 301309)
- Medium Round Stainless Insert, 1/1 (Part # CT-103129)
- Medium Round Porcelain Insert 1/1 (Part # CT-103094)
- Serving Spoon Holder, Large or Medium (Part # CT-103097)



301311 (Large)  
301309 (Medium)



CT-103128 (Large)  
CT-103129 (Medium)



CT-103771  
(Large)



CT-103095 (Large)  
CT-103094 (Medium)



CT-103096 (Large)







CT-103097  
(Large or Medium)

### CERTIFICATIONS



\*Induction buffet units require the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

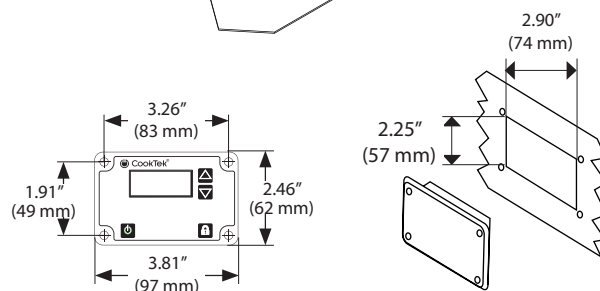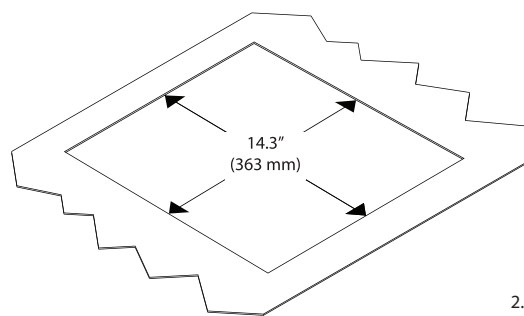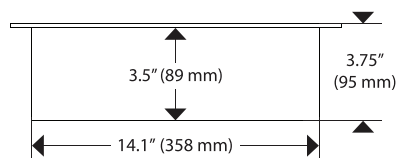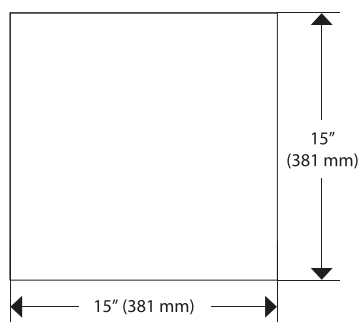

| DIMENSIONS               |                                 |        |
|--------------------------|---------------------------------|--------|
| Full Unit Height         | 3.75"                           | 95 mm  |
| Housing Height           | 3.5"                            | 89 mm  |
| Full Unit Width          | 15"                             | 381 mm |
| Housing Width            | 14.1"                           | 358 mm |
| Full Unit Depth          | 15"                             | 381 mm |
| Housing Depth            | 14.1"                           | 358 mm |
| Cutout Width             | 14.3"                           | 363 mm |
| Cutout Depth             | 14.3"                           | 363 mm |
| Weight                   | 13 lb.                          | 5.9 kg |
| CLEARANCE                |                                 |        |
| Front                    | 2"                              | 51 mm  |
| Sides                    | 2"                              | 51 mm  |
| Rear                     | 2"                              | 51 mm  |
| Below                    | 6"                              | 152 mm |
| Max Ambient Temperature* | 122°F                           | 50°C   |
| SHIPPING INFORMATION     |                                 |        |
| Packaged Height          | 10"                             | 254 mm |
| Packaged Width           | 20"                             | 508 mm |
| Packaged Depth           | 20"                             | 508 mm |
| Packaged Weight          | 17 lb.                          | 7.7 kg |
| Item Class               | 250 NMFC #26710 HS code 8419.81 |        |

\* Adequate cabinet ventilation should be provided for all drop-in models to prevent overheating of unit.

#### Global Operations

2801 Trade Center Drive / Carrollton, Texas 75007 USA  
 US: 800.90TURBO (800.908.8726) / International: +1 214.379.6000  
 Fax: +1 214.379.6073 / www.cooktek.com

| ELECTRICAL SPECIFICATIONS (SINGLE PHASE) |        |                                      |                               |
|------------------------------------------|--------|--------------------------------------|-------------------------------|
| MODEL B651-D                             |        |                                      |                               |
| UNITED STATES/<br>CANADA                 | 658501 | 100–120 V, 50/60 Hz, 6 A, 100–650 W  | NEMA 5-15P                    |
| MODEL B652-D                             |        |                                      |                               |
| UNITED STATES/<br>CANADA                 | 658601 | 200–240 V, 50/60 Hz, 4 A, 100–650 W  | NEMA 6-20P                    |
| UK/ SAUDI<br>ARABIA                      | 658602 | 200–240 V, 50/60 Hz, 4 A, 100–650 W  | BS1363, 13A, 230V             |
| INTERNATIONAL                            | 658603 | 200–240 V, 50/60 Hz, 4 A, 100–650 W  | CEE 7/7 Schuko,<br>16A, 250V  |
| AUSTRALIA                                | 658604 | 200–240 V, 50/60 Hz, 4 A, 100–650 W  | AS/NZ 3112:2000,<br>10A, 250V |
| SOUTH AFRICA                             | 658607 | 200–240 V, 50/60 Hz, 4 A, 100–650 W  | BS 546, 16A, 250V             |
| ISRAEL                                   | 658608 | 200–240 V, 50/60 Hz, 4 A, 100–650 W  | SI 32, 16A, 250V              |
| MODEL B1001-D                            |        |                                      |                               |
| UNITED STATES/<br>CANADA                 | 660701 | 100–120 V, 50/60 Hz, 6 A, 100–1000 W | NEMA 5-15P                    |
| MODEL B1002-D                            |        |                                      |                               |
| UNITED STATES/<br>CANADA                 | 660501 | 200–240 V, 50/60 Hz, 4 A, 100–1000 W | NEMA 6-20P                    |



NEMA 5-15P



AS/NZ 3112:2000,  
10A, 250V



NEMA 6-20P



BS 546, 16A, 250V



BS1363, 13A, 230V



CEE 7/7 Schuko,  
16A, 250V



SI 32, 16A, 250V