





## MANUFACTURER

HALLDE

## MODEL

RG-350


## PRODUCT DESCRIPTION

Vegetable Preparation Machine, process up to 15 kg/minute.

## ORIGIN

Sweden

	-				
		PECIFICATION			
SPECIFICATION TEXT	Vegetable preparation machine with leaning design and full moon feed cylinder, made to process up to 15 kg/minute or 1 500 portions/day. Machine has aluminium pusher plate with loop shaped stainless steel handle and a tube feeder of 59 mm in diameter. Pusher plate with system for leverage effect. 5.7 litre feed cylinder with 62 mm inner wall. Cutting tools are made of stainless steel/aluminium with removable knifes/plates and are 215 mm in diameter. Motor rotate the cutting blade clockwise and direct without intermediate belts.				
FUNCTION	Machine for slicing, dicing, shredding, grating, cutting julienne and French fries. Processes fruit, vegetables, dry bread, cheese, nuts, mushrooms, etc.				
CAPACITY	Up to 1 500 portions/day. Up to 15 kg/minute.				
MATERIAL	Machine base and feed cylinder: aluminium alloy. Push handle: stainless steel. Cutting tools: Stainless steel/ Aluminum.				
MOTOR	0.75 kW. One-speed (360 rpm) 220-240 V, 1-phase, 50-60 Hz.   220-240 V, 3-phase, 50-60 Hz.   120 V, 1-phase, 60 Hz   380-415 V, 3-phase, 50 Hz.   440-460 V, 3-phase, 60 Hz. Thermal protection, Planetary gearing.				
POWER SUPPLY	Earthed, single phase / three phase.				
STANDARDS	EN 1678+A1:2010. NSF/ANSI Standard 8.				
RECOMMENDED CUTTING TOOL PACKAGES	INCLUDING  • 6-pack Cutting Tools  - Slicer 1.5 mm - Grater/Shredder 4.5 mm - Dicing Grid 10x10 mm  - Slicer 4 mm  - Slicer 6 mm  - Slicer 10 mm				NET WEIGHT 6 kg
	9-pack Cutting Tools     Slicer 1.5 mm				9 kg
WEIGHT/VOLUME	CONTENT	NET WEIGHT	PACKAGES	FREIGHT WEIGHT	FREIGHT VOLUME
	RG-350 Machine	32 kg	1	36 kg	0.198 m³
	Container Trolley incl. GN 1/1 container	9 kg	1	12.5 kg	0.15 m <sup>3</sup>
	Machine Table incl. GN 1/1 container	13,25 kg	1	14,5 kg	0,8 m³
SAFETY	2014/30/EU, 2014/35/EU, 2006/42/EG, 2011/65/EU, no 10/2011, 1935/2004CE, SS-EN ISO 26800:2011.				
DIRECTIVE AND REGULATION	CE approved. Two safety switches, machine safety: IP44, push buttons safety: IP65.				

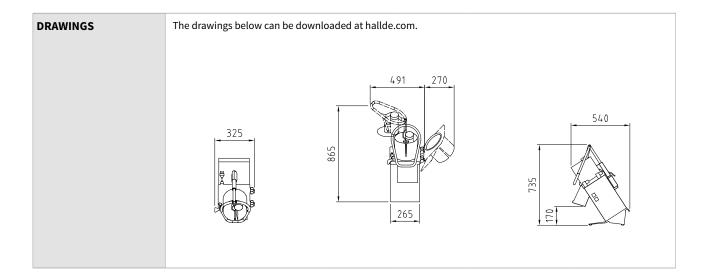

AB Hällde Maskiner P.O. Box 1165, SE-164 26 KISTA, Sweden