
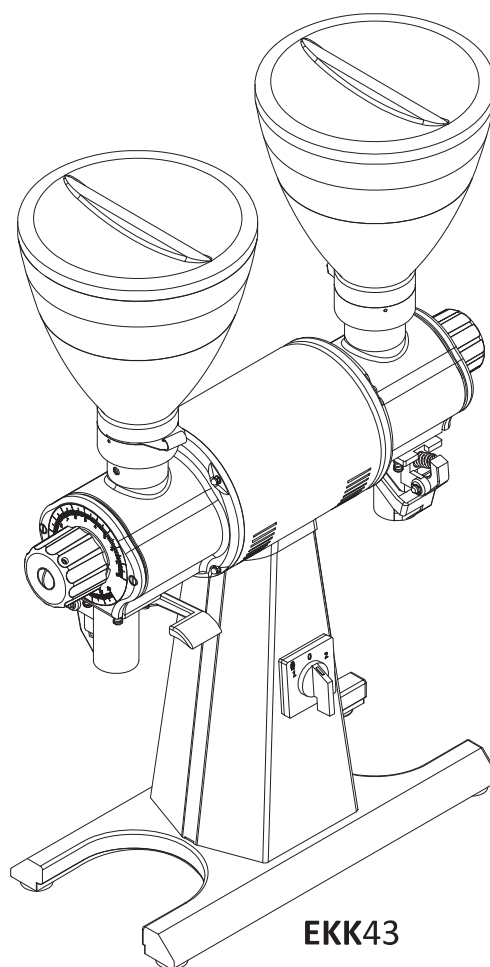
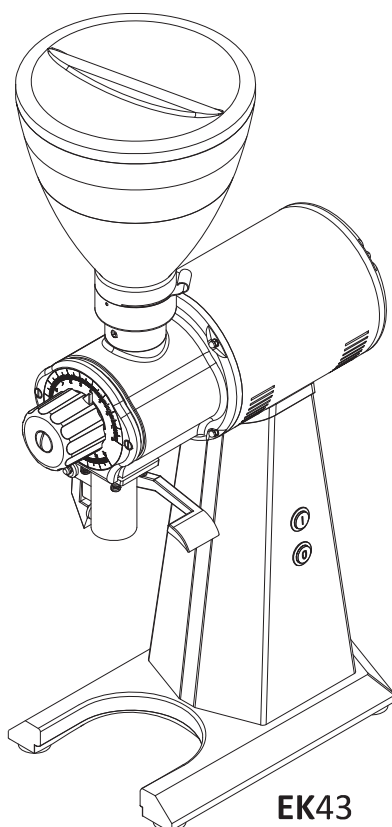


EK43 | EK43 S | EKK43

INSTRUCTION MANUAL

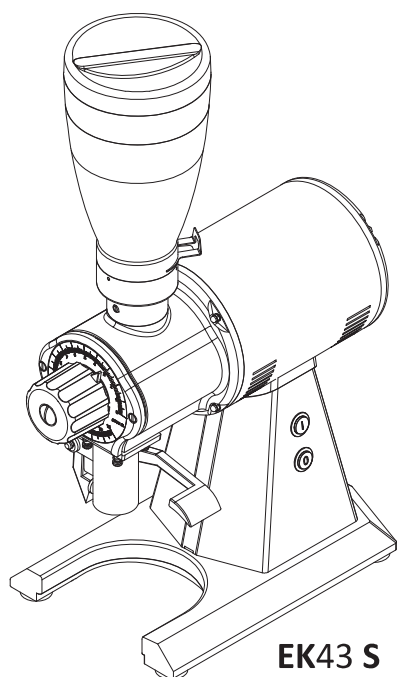

Technical data

Model:	EK43 EK43 S EKK43
Voltage / frequency:	100–120 V; 50/60 Hz 110–127 V; 60 Hz 220–240 V; 50/60 Hz
Protection type:	IPX1
Protection class:	I 
Back-up fuse:	16 A-slow
Idle speed:	
50 Hz	1,480 rpm
60 Hz	1,740 rpm
Sound emission value:	
Idle:	60 dB(A)
Grinding:	87 dB(A)
Grinding capacity:	1.5 kg/min*
Max. grinding time:	40 min
Max. daily output EK43 EK43 S :	240 kg
Max. daily output EKK43 :	320 kg (drip coffee) 216 kg (Turkish grind)
Dimensions (W × D × H):	
EK43	230 x 410 x 830 mm
EK43 S	230 x 410 x 680 mm
EKK43	230 x 590 x 770 mm
Weight (net):	
EK43	24.4 kg
EK43 S	23.4 kg
EKK43	28.0 kg
Max. funnel fill amount:	
EK43 EKK43	1.5 kg 2x 1.5 kg
EK43 S	0.8 kg

*depending on the coffee beans and the selected grinding degree.