




DROP-IN INDUCTION WOK with Standard Controls

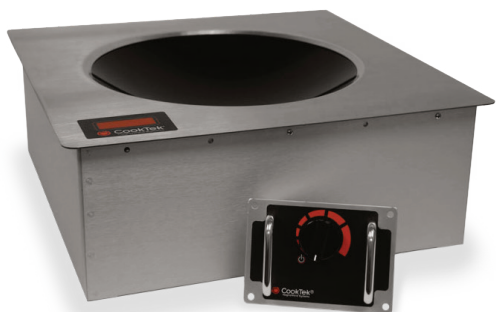

PERFORMANCE

The CookTek® Drop-in Induction Wok with Standard Controls boasts a drop-in countertop design with a stainless steel top, aluminum housing, and a recessed glass-ceramic wok bowl intended for commercial kitchens and restaurants. An automatic shut-off feature, integral cooling fan, and self-diagnosing microprocessor allow for a safe kitchen environment. Each unit is equipped with 20 precise power settings to ensure maximum and efficient heating of any induction compatible wok pan.*

Project _____

Item No. _____

Quantity _____

FEATURES

- Models available in 1800 (U.S. only), 2500, 3000, 3500 watts
- Drop-in design with stainless steel top and aluminum housing
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high temperature glass-ceramic wok bowl
- Automatic pan detection allows for instant energy transmission to pan
- LED display for precise user feedback
- Programmed with 20 power cook settings
- Automatic shut-off feature prohibits overheating
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Integral fan keeps internal components cool
- Available in 100-120 VAC or 200-240 VAC, single phase
- Includes plug and cord (6 ft. nominal)
- Two-year advanced replacement warranty – U.S. and Canada

ACCESSORIES (NOT INCLUDED)

- 14" (356 mm) Stainless Steel Wok (Part # CT-103871)
- Wok Replacement Handle (Part # CT-102881)






CT-103871

CERTIFICATIONS



*Induction cooking requires the use of induction compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

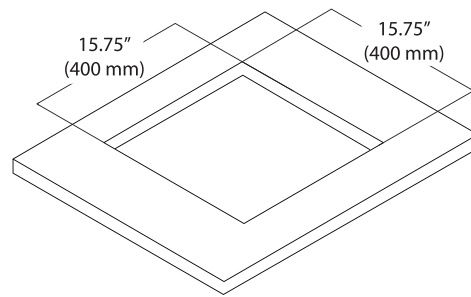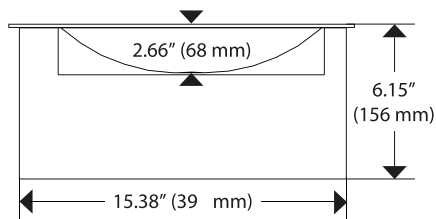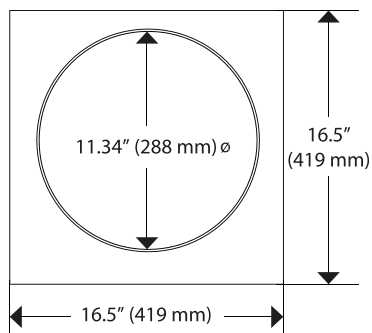

1

DIMENSIONS		
Full Unit Height	6.15"	156 mm
Full Unit Width	16.5"	419 mm
Housing Width	15.38"	391 mm
Full Unit Depth	16.5"	419 mm
Housing Depth	15.38"	391 mm
Bowl Width	11.34" ø	288 mm ø
Bowl Vertical Depth	2.66"	68 mm
Cutout Width	15.75"	400 (mm)
Cutout Height	15.75"	400 (mm)
Weight	22 lb.	9.98 kg
CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
Below	6"	152 mm
COOLING REQUIREMENTS AND SPECIFICATIONS*		
Max Ambient Temperature	122°F	50°C
Min. Ventilation Requirements	16 in ²	103 cm ²
INTERNAL COOLING FAN DISPLACEMENT		
100-120 V Models	50 CFM (1.5m ³ /min.)	
200-240 V Models	70 CFM (2.0m ³ /min)	
SHIPPING INFORMATION		
Packaged Height	13"	330 mm
Packaged Width	23"	584 mm
Packaged Depth	24"	610 mm
Packaged Weight	23 lb.	10.4 kg
Item Class	250 NMFC #26710	



NEMA 5-15P



AS/NZS 3112:2000,
10A, 250V



NEMA 6-20P



AS/NZS 3112:2000,
15A, 250V



BS1363



BS 546, 16A, 250V



IEC 309, 16A, 3-pin



CEE 7/7 Schuko



SI 32, 16A, 250V

ELECTRICAL SPECIFICATIONS (SINGLE PHASE)				
UNITED STATES/CANADA				
MWDG1800	605301	100-120 V, 50/60 Hz, 15 A, 100-1800 W	NEMA 5-15P	
MWDG2500	605401	200-240 V, 50/60 Hz, 12 A, 100-2500 W	NEMA 6-20P	
MWDG3000	605501	200-240 V, 50/60 Hz, 14 A, 100-3000 W	NEMA 6-20P	
MWDG3500	605601	200-240 V, 50/60 Hz, 15 A, 100-3500 W	NEMA 6-20P	
UK AND SAUDI ARABIA				
MWDG2500	605402	200-240 V, 50/60 Hz, 12 A, 100-2500 W	BS1363	
MWDG3000	605502	200-240 V, 50/60 Hz, 14 A, 100-3000 W	BS1363	
MWDG3500	605602	200-240 V, 50/60 Hz, 15 A, 100-3500 W	IEC 309, 16A, 3-pin	
INTERNATIONAL				
MWDG2500	605403	200-240 V, 50/60 Hz, 12 A, 100-2500 W	CEE 7/7 Schuko	
MWDG3000	605503	200-240 V, 50/60 Hz, 14 A, 100-3000 W	CEE 7/7 Schuko	
MWDG3500	605603	200-240 V, 50/60 Hz, 15 A, 100-3500 W	IEC 309, 16A, 3-pin	
AUSTRALIA				
MWDG2500	605404	200-240 V, 50/60 Hz, 12 A, 100-2500 W	AS/NZS 3112:2000, 10A, 250V	
MWDG3000	605504	200-240 V, 50/60 Hz, 14 A, 100-3000 W	AS/NZS 3112:2000, 15A, 250V	
MWDG3500	605604	200-240 V, 50/60 Hz, 15 A, 100-3500 W	AS/NZS 3112:2000, 15A, 250V	
SOUTH AFRICA				
MWDG2500	605407	200-240 V, 50/60 Hz, 12 A, 100-2500 W	BS 546, 16A, 250V	
MWDG3000	605507	200-240 V, 50/60 Hz, 14 A, 100-3000 W	BS 546, 16A, 250V	
MWDG3500	605607	200-240 V, 50/60 Hz, 15 A, 100-3500 W	BS 546, 16A, 250V	
ISRAEL				
MWDG2500	605408	200-240 V, 50/60 Hz, 12 A, 100-2500 W	SI 32, 16A, 250V	
MWDG3000	605508	200-240 V, 50/60 Hz, 14 A, 100-3000 W	SI 32, 16A, 250V	
MWDG3500	605608	200-240 V, 50/60 Hz, 15 A, 100-3500 W	SI 32, 16A, 250V	

* Adequate cabinet ventilation should be provided for all drop-in models to prevent overheating of unit



Dedicated circuit required for each installation

Global Operations

2801 Trade Center Drive / Carrollton, Texas 75007 USA
US: 800.90TURBO (800.908.8726) / International: +1 214.379.6000
Fax: +1 214.379.6073 / www.cooktek.com