Installation Requirements

Slayer Steam 3-group

Counter

- Width: 44.5 inches / 113 centimeters
- · Length: 28 inches / 71 centimeters
- · Height: 16.75 inches / 42.5 centimeters
- Weight: 305 lbs / 139 kg (tanks filled)

Measurements do not include overhanging components: portafilters, brew actuators, cup rails

Water


- 3/8-inch BSP dedicated cold water line with shutoff valve (in North America, 3/8-inch compression fitting is included)
- Incoming water pressure: 3 Bar min, 5 Bar max
- Water hardness cannot exceed 50ppm, otherwise a water softener is needed

Power


- Single-phase: 200-260 volts AC, 50/60 hertz, 35 amps, 7,300 watts
- Three-phase: 380-400 volts AC, 50/60 hertz, 22 amps, 7,300 watts
- Receptacle: NEMA L6-30

Drain

- Open gravity drain located within 4 feet / 1.2 meters of the machine
- Two (2) drain hoses: 7/8-inch outside diameter, 5/8-inch inside diameter (2.2-centimeter outside diameter, 1.6-centimeter inside diameter)
- Ensure drain line is always sloping downwards

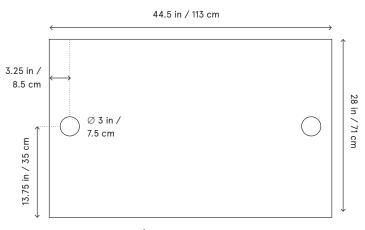

← Drip tray edge

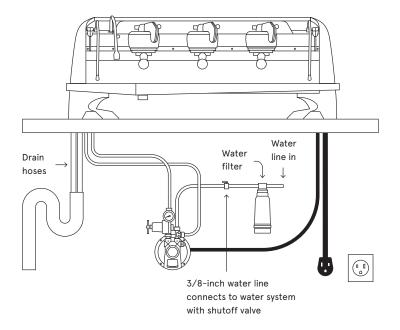

Slagen®



F +1 206 284 7766 SUPPO

SUPPORT@SLAYERESPRESSO.COM 6133 61

(€ ∰ ₪

ዉ

6133 6TH AVE S. SEATTLE, WA 98108 SLAYERESPRESSO.COM