salva





SA LVA FR IO FCK-12

FCSR-12 is a fermentation controlled camera, for racks. This camera has the most innovative features, becoming an indispensable element in any workshop of the sigle XXI.

CHARACTERISTICS

Cooling unit

The heart of each FC comprises carefully selected components from leading suppliers, assembled and tested for 24 hours at our facilities by expert in refrigeration.

Easy assembly system

The INSTACLACK system is fast, clean and simple, providing a easy assembly.

Control panel

Is fitted with the FC TOUCH houses all of Salva's experience in controlled fermentation.

Thermally shielded The Chamber structure consists of high density injected polyurethane SANDWICH panels, with 70 mm on the sides and roof and 21 mm in soil.

Air distribution

The interior is designed to ensure the perfect distribution of cold, using the system that conduct air and moisture from botton to the top, obtaining a uniform fermentation.

Independent Isothermal steam generator Has the capacity of filling the chamber with moisture in a few seconds.

FCK-12 DETAILS AND COMPOSITION

Capacity

- 2 raks type SR (maximum height 1800 mm).
- Trays dimensions 80 x 60 cm.

R134 A fluid refrigerator.

Use of refrigerant which doesn't damage the ozone layer.

Ramp

It facilitates truck access to the interior of the fermenter.


GENERAL DIMENSIONS

Single front door FC	camera
----------------------	--------

Technical data FCSR-12

kW	V	А	Hz	
2.2 (III+N+T)	230	9.1	50	
	400	5.7	50	

Cooling power / capacity: 3.184 kW

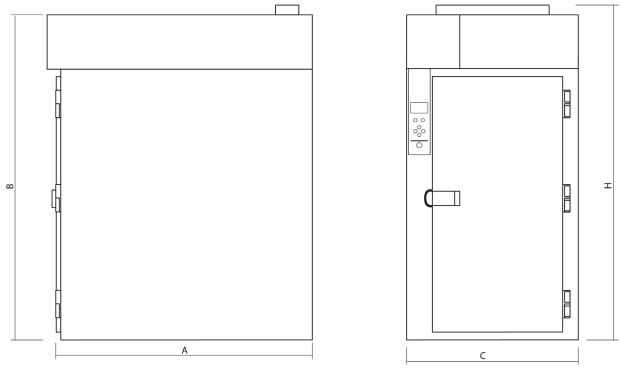

	А	В	С	Н
FCK-12	1250 mm	2345 mm	1260 mm	2405 mm

INSTALLATIONS IN DETAIL

A Water supply

Network with maximum pressure intake of 2 bar. Necessary to place a manual step key of 1/2". End of the tube with 3/8" male connector.

B Drainage


The tube must be at least 35 mm inner diameter.

C Electric power supply

The electrical connection should be performed by authorized professionals, following the rules in force in each country.

Facilities location (mm)

	Х	Y	Z
Drainage	-*	0	70





SALVA INDUSTRIAL S.A. Poligono 107, GI-636, Km 6 E-20.100 Lezo (Guipuzkoa) Tel. +34 943 449 300 / Fax. +34 943 449 329

e-mail España: salva@salva.es e-mail Export: sales@salva.es www.salva.es